
Micro Focus Security ArcSight Kafka FlexConnector

FlexConnector Configuration Guide

Document Release Date: December 9, 2019

Software Release Date: December 9, 2019



Legal Notices

Micro Focus
The Lawn
22-30 Old Bath Road
Newbury, Berkshire RG14 1QN
UK

<https://www.microfocus.com>

Copyright Notice

© Copyright 2019 Micro Focus or one of its affiliates

Confidential computer software. Valid license from Micro Focus required for possession, use or copying. The information contained herein is subject to change without notice.

The only warranties for Micro Focus products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Micro Focus shall not be liable for technical or editorial errors or omissions contained herein.

No portion of this product's documentation may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or information storage and retrieval systems, for any purpose other than the purchaser's internal use, without the express written permission of Micro Focus.

Notwithstanding anything to the contrary in your license agreement for Micro Focus ArcSight software, you may reverse engineer and modify certain open source components of the software in accordance with the license terms for those particular components. See below for the applicable terms.

US Governmental Rights. For purposes of your license to Micro Focus ArcSight software, "commercial computer software" is defined at FAR 2.101. If acquired by or on behalf of a civilian agency, the US Government acquires this commercial computer software and/or commercial computer software documentation and other technical data subject to the terms of the Agreement as specified in 48 C.F.R. 12.212 (Computer Software) and 12.211 (Technical Data) of the Federal Acquisition Regulation ("FAR") and its successors. If acquired by or on behalf of any agency within the Department of Defense ("DOD"), the US Government acquires this commercial computer software and/or commercial computer software documentation subject to the terms of the Agreement as specified in 48 C.F.R. 227.7202-3 of the DOD FAR Supplement ("DFARS") and its successors. This US Government Rights Section 18.11 is in lieu of, and supersedes, any other FAR, DFARS, or other clause or provision that addresses government rights in computer software or technical data.

Trademark Notices

Adobe™ is a trademark of Adobe Systems Incorporated.

Microsoft® and Windows® are US registered trademarks of Microsoft Corporation.

UNIX® is a registered trademark of The Open Group.

Documentation Updates

The title page of this document contains the following identifying information:

- Software Version number
- Document Release Date, which changes each time the document is updated
- Software Release Date, which indicates the release date of this version of the software

To check for recent updates or to verify that you are using the most recent edition of a document, go to:

[ArcSight Product Documentation on the Micro Focus Security Community](#)

Support

Contact Information

Phone	A list of phone numbers is available on the Technical Support Page: https://softwaresupport.softwaregrp.com/support-contact-information
Support Web Site	https://softwaresupport.softwaregrp.com/
ArcSight Product Documentation	https://community.softwaregrp.com/t5/ArcSight-Product-Documentation/ctp/productdocs

Document Revision History

The title page of this document contains the following identifying information:

- Software Version number, which indicates the software version.
- Document Release Date, which changes each time the document is updated.

To check for recent updates or to verify that you are using the most recent edition of a document, go to [ArcSight Product Documentation Community on the Micro Focus Security Community](#).

Document Changes

Date	Product Version	Description
07/24/2019	1.0	First edition of this guide

Contents

Overview	5
Understanding Kafka	5
SSL encryption and authentication	6
To enable SSL encryption and authentication:	6
To SSL for inter-broker communication:	7
Creating Flex Parsers	7
Preparing to Install the FlexConnector	7
Add JSON Parser	8
Set Global Parameters (Optional)	8
Connector Setup	9
Select a Destination and Complete Installation	10
Advanced Parameters	11
Send Documentation Feedback	13

Overview

The Arcsight Kafka FlexConnector helps you subscribe and collect events from a topic of Kafka server and the topic only contains a specific event type.

This version supports 5 event types:

- JSON
- CEF
- REGEX
- SYSLOG
- KEY-VALUE.

This is a FlexConnector so you need create your personal parsers before setup connector.

Understanding Kafka

Apache Kafka is a distributed publish-subscribe messaging system and a robust queue that handles a high volume of data and enables you to pass messages from one end-point to another.

Kafka is suitable for both offline and online message consumption.


Kafka messages are persisted on the disk and replicated within the cluster to prevent data loss. it is built on top of the ZooKeeper synchronization service and it integrates very well with Apache \Storm and Spark for real-time streaming data analysis.

The following diagram illustrates the main terminologies and the table describes the diagram components in detail. A topic is configured into three partitions.

- Partition 1 has two offset factors 0 and 1.
- Partition 2 has four offset factors 0, 1, 2, and 3.
- Partition 3 has one offset factor 0.

The Id of the replica is same as the Id of the server that hosts it.

Assume, you want to install 3 Kafka Flex Connectors to parse data of a topic, you need to increase the partitions of your Kafka server.

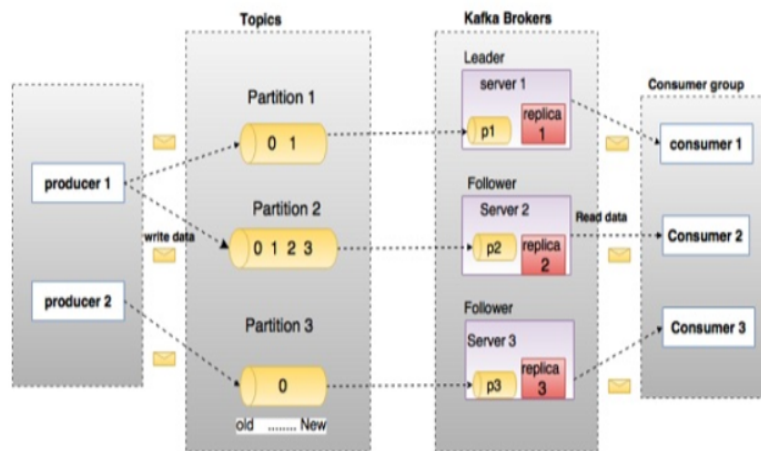

For more information about Apache Kafka, see [Configuring Apache Kafka in Windows or Linux Platforms](#)

SSL encryption and authentication

About

The Arcsight Kafka FlexConnector provides secure connection to Kafka servers.

Procedure

To enable SSL encryption and authentication:

1. Configure the truststore, keystore, and password in the server.properties file of every broker.
2. Passwords are directly stored in the broker configuration file, so restrict the access to these files via file system permissions

```
ssl.truststore.location=/var/private/ssl/kafka.server.truststore.jks
```

```
ssl.truststore.password=test1234
```

```
ssl.keystore.location=/var/private/ssl/kafka.server.keystore.jks
```

```
ssl.keystore.password=test1234
```

```
ssl.key.password=test1234
```

Note `ssl.truststore.password` is optional but highly recommended. If a password is not set, access to the truststore is still available, but integrity checking is disabled.

To SSL for inter-broker communication:

1. Add the following property to the broker properties file (it is **PLAINTEXT** by default).
`security.inter.broker.protocol=SSL`
2. Configure the Apache Kafka® broker ports which listen to client and inter-broker **SSL** connections. Configure the **`listeners`** and the **`advertised.listeners`**, in case the value is different.

`listeners=SSL://kafka1:9093`

`advertised.listeners=SSL://0.0.0.0:9093`

3. Configure the **PLAINTEXT** ports if:
 - SSL is not enabled for inter-broker communication.
 - Some clients connecting to the cluster do not use SSL.

`listeners=PLAINTEXT://kafka1:9092,SSL://kafka1:9093`

`advertised.listeners=PLAINTEXT://0.0.0.0:9092,SSL://0.0.0.0:9093`

Note `advertised.host.name` and `advertised.port` configure a single **PLAINTEXT** port are incompatible with secure protocols. Use **`advertised.listeners`** instead.

4. To enable the broker to authenticate clients (2-way authentication), you need to configure all the brokers for client authentication. We recommend setting this value to **`required`**.

`ssl.client.auth=required`

Note Do not use **`requested`** as it creates a false sense of security.

Important: If any of the SASL authentication mechanisms are enabled on a given listener, the SSL client authentication is disabled, even if **`ssl.client.auth=required`** is previously configured. The broker will only authenticate clients via SASL on that listener.

Creating Flex Parsers

To create a flex Parser, see the [ArcSight FlexConnector Developer's Guide](#)

Preparing to Install the FlexConnector

Before installing the FlexConnector, be sure the following are available:

- Local access to the machine where the FlexConnector is to be installed
- Vendor login credentials (user name and password). During the configuration, you are redirected to the vendor's login page, where you will log into the vendor's application using your vendor credentials. After you log into the vendor application, the connector can access and collect vendor log data.

Unless specified otherwise at the beginning of this guide, this connector can be installed on all ArcSight supported platforms; for the complete list, see the [SmartConnector Platform Support](#) document, available from the Micro Focus SSO and Protect 724 sites.

Note: On the Linux platform, if you are logged in as **root** and use Firefox, some versions of the browser can cause the browser launched by the connector during configuration not to open. If you see this issue, try configuring the connector as a non-root user. If you configure the connector as a non-root user, however, you cannot run the connector as a service.

Add JSON Parser

1. Before configuring the connector, you must exit the wizard to make your JSON parser available to the connector. Click **Cancel** to exit the wizard.
2. Copy your JSON parser file into the `$ARCSIGHT_HOME\current\user\agent\flexagent` directory. See ["Create a JSON Parser File"](#) for details on creating the JSON parser file.
3. Execute **runagentsetup** from `$ARCSIGHT_HOME\current\bin` to return to the wizard.

Continue with ["Advanced Parameters"](#) if you want to change the settings of the Kafka Server. Otherwise, continue with ["Configure Connector Parameters."](#)

Set Global Parameters (Optional)

If you choose to perform any of the operations shown in the following table, do so before adding your connector. After installing core software, you can set the following parameters:

Global Parameter	Setting
FIPS mode	Set to Enabled to enable FIPS compliant mode. To enable FIPS Suite B Mode, see the <i>SmartConnector User Guide</i> under "Modifying Connector Parameters" for instructions. Initially, this value is set to Disabled .
Remote Management	Set to Enabled to enable remote management from Management Center. When queried by the remote management device, the values you specify here for enabling remote management and the port number will be used. Initially, this value is set to Disabled .
Remote Management Listener Port	The remote management device will listen to the port specified in this field. The default port number is 9001.
Preferred IP Version	When both IPv4 and IPv6 IP addresses are available for the local host (the machine on which the connector is installed), you can choose which version is preferred. Otherwise, you will see only one selection. The initial setting is IPv4 .

The following parameters should be configured only if you are using Micro Focus SecureData solutions to provide encryption. See the *Micro Focus SecureData Architecture Guide* for more information.

Global Parameter	Setting
Format Preserving Encryption	Data leaving the connector machine to a specified destination can be encrypted by selecting 'Enabled' to encrypt the fields identified in 'Event Fields to Encrypt' before forwarding events. If encryption is enabled, it cannot be disabled. Changing any of the encryption parameters again will require a fresh installation of the connector.
Format Preserving Host URL	Enter the URL where the Micro Focus SecureData server is installed.
Proxy Server (https)	Enter the proxy host for https connection if any proxy is enabled for this machine.
Proxy Port	Enter the proxy port for https connection if any proxy is enabled for this machine.
Format Preserving Identity	The Micro Focus SecureData client software allows client applications to protect and access data based on key names. This key name is referred to as the identity. Enter the user identity configured for Micro Focus SecureData.
Format Preserving Secret	Enter the secret configured for Micro Focus SecureData to use for authentication.
Event Fields to Encrypt	Recommended fields for encryption are listed; delete any fields you do not want encrypted from the list, and add any string or numeric fields you wish to be encrypted. Encrypting more fields can affect performance, with 20 fields being the maximum recommended. Also, because encryption changes the value, rules or categorization could also be affected. Once encryption is enabled, the list of event fields cannot be edited.

After making your selections, click **Next**. A summary screen is displayed. Review the summary of your selections and click **Next**. Click **Continue** to return to the "Add a Connector" window. Continue the installation procedure with "Configure Connector Parameters".

Connector Setup

Configure Connector Parameters

1. Select **Add a Connector** and click **Next**.
2. Select **ArcSight FlexConnector Kafka** and click **Next**.

Parameter	Setting
Log Unparsed Events	Log unparsed events on the log folder and only use it for regex and syslog content types.
Host:Port(s)	Host and port of the Kafka server
Topics	Topic name of the Kafka server
Content Type	Add 5 supported event types: JSON , CEF , SYSLOG , REGEX , and KEY-VALUE

Parameter	Setting
Configuration File Name Prefix	<p>Enter the name of the parser file once you have ensured the parser file has been copied into the <code>\$ARCSIGHT_HOME\current\user\agent\flexagent\syslog</code> directory for SYSLOG parser or <code>\$ARCSIGHT_HOME\current\user\agent\flexagent</code> directory for the remaining event types.</p> <p>For example: for <code>\$ARCSIGHT_HOME\current\user\agent\flexagent\google.jsonparser.properties</code>. You can enter the prefix <code>google</code>, and the connector assumes the file name is <code>google.jsonparser.properties</code> and resides in <code>\$ARCSIGHT_HOME\current\user\agent\flexagent</code>.</p> <p>For more information, see https://community.microfocus.com/t5/ArcSight-Connectors/ArcSight-FlexConnector-Developer-s-Guide/ta-p/1584874</p>
Use SSL/TLS	Set the value to True if the Kafka server requires it for encrypted data.
SSL/TLS Trust Store file	Add file path of the SSL/TLS Trust Store file.
SSL/TLS Trust Store password	Add the SSL/TLS Trust Store password of the store file above.
Use SSL/TLS Authentication	Set the value to True if the Kafka server requires it for authentication. You also need to enable the Use SSL/TLS parameter.
SSL/TLS Key Store file	Add the file path of the SSL/TLS Key Store file.
SSL/TLS Key Store pass	Add the SSL/TLS Key Store password.
SSL/TLS Key password	Add the SSL/TLS Key password.

Select a Destination and Complete Installation

1. Make sure **ArcSight Manager (encrypted)** is selected and click **Next**. For information about this and other destinations listed, see the *ArcSight SmartConnector User Guide* and the Administrator's Guide for your ArcSight product.
2. Enter the **Manager Host Name**, **Manager Port**, and a valid ArcSight **User Name** and **Password**. This is the same user name and password you created during the ArcSight Manager installation. Click **Next**.
3. Enter a name for the connector and provide other information identifying the connector's use in your environment. Click **Next**; the connector starts the registration process.
4. The certificate import window for the ESM Manager is displayed. Select **Import the certificate to the connector from destination** and click **Next**. The certificate is imported and the **Add Connector Summary** window is displayed. If you select **Do not import the certificate to connector from destination**, then the connector installation will end.
5. Review the Add Connector Summary and click **Next**. If the summary is incorrect, click **Previous** to make changes.
6. The wizard now prompts you to choose whether you want to run the connector as a stand-alone process or as a service. If you choose to run the connector as a stand-alone process, skip step 7. If you choose to run the connector as a service, the wizard prompts you to define service parameters.

7. Enter values for **Service Internal Name** and **Service Display Name** and select **Yes** or **No** for **Start the service automatically**. The **Install Service Summary** window is displayed when you click **Next**.
8. Click **Next**.

To complete the installation, choose **Exit** and click **Next**.

Note: Save any work on your computer or desktop and shut down any other running applications (including the ArcSight Console, if it is running), then shut down the system.

Complete any tasks needed in "[Parameter Modifications to Optimize Connector Performance](#)", then continue with the "[Run the SmartConnector](#)".

For connector upgrade or uninstall instructions, see the *SmartConnector User Guide*.

Advanced Parameters

If you choose to perform any of the operations shown in the following table, do so before adding your connector. After installing core software, you can set the following parameters:

Parameter	Setting
<code>bootstrap.servers</code>	Host-IP
<code>group.id</code>	Use for multiple connectors in a Kafka topic.
<code>max.poll.records</code>	The maximum number of records returned in a single call to a <code>poll()</code> . Default value is 500 (maximum).
<code>auto.commit.interval.ms</code>	The frequency in milliseconds in which the consumer offsets are auto-committed to Kafka if the <code>enable.auto.commit</code> value is set to True . 5000 milliseconds.
<code>reconnect.backoff.ms</code>	The base waiting time, before attempting to reconnect to a given host. It avoids repeatedly connecting to a host in a tight loop. This backoff applies to all client connection attempts to a broker: 50 times
<code>retry.backoff.ms</code>	The amount of waiting time before attempting to retry a failed request to a given topic partition. It avoids repeatedly sending requests in a tight loop under some failure scenarios: 100 times.
<code>request.timeout.ms</code>	It controls the maximum amount of waiting time for a request response. If the response is not received before the timeout elapses, the client resends or fails the request (if the connection attempts have reached the limit: 30000 milliseconds).
<code>client.id</code>	An id string to pass to the server when making requests. It tracks the request source beyond just ip/port, by allowing a logical application name to be included on the server-side login request. For tracking: arcsight

Parameter	Setting
<code>heartbeat.interval.ms</code>	The expected time between heartbeats to the consumer coordinator when using Kafka's group management facilities. Heartbeats are used to ensure that the consumer's session stays active and facilitates rebalancing when new consumers join or leave the group. The value must be set lower than <code>session.timeout.ms</code> and higher than 1/3 of that value. It can be adjusted even lower to control the expected time for normal rebalances.
<code>connections.max.idle.ms</code> (Idle connections timeout)	The server socket processor threads close the connections that appear idle for more than 600000 ms.
<code>auto.offset.reset</code>	It can be executed when there is not an initial offset in Kafka or if the current offset does not exist in the server anymore.
<code>disable.activemq</code>	The values can be: True: Disable ActiveMQ False: Enable ActiveMQ

Send Documentation Feedback

If you have comments about this document, you can [contact the documentation team](#) by email. If an email client is configured on this computer, click the link above and an email window opens with the following information in the subject line:

Feedback on Configuration Guide (Kafka FlexConnector)

Just add your feedback to the email and click send.

If no email client is available, copy the information above to a new message in a web mail client, and send your feedback to arcsight_doc@microfocus.com.

We appreciate your feedback!